

AMP-38W Wet-mixed Motar Spraying Machine




AMP-38W Wet-mixed Motar Sparying Machine Description

This mortar pump is suitable for pumping and spraying the wet ready-mixed mortar witch is pumpable, such as Cement mortars, Lime plasters, Gypsum plasters, Masonry mortars, Insulating plasters, Self-leveling floor screeds, etc.

AMP-38W Wet-mixed Motar Sparying Machine Features

- working by hose pump, pipeline broad.
- mensurable transportation, no reflence, transportation or spraying steady.
- suction forceful.
- cleaning convenient.
- maintain convenient, low consume for working.
- externality small.

AMP-38W Pump Structure Principle

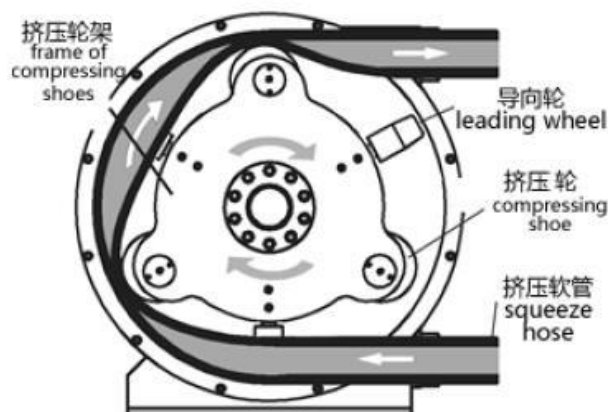

泵体结构原理

Pump Configuration Principle

AMP-38W Wet-mixed Motar Sparying Machine Technical Data

Output	30 L/min
Rated Working Pressure	3 Mpa
Total Power	4.5 Kw
Main Electric Motor	2.2 Kw
Stretch hose ID.	38 mm
Rated Air Output	250 L/min
Max.Conveying Dist.	30 m
Hopper Capacity	26 L
Loading Height	800 mm
Conveying Hose ID.	38 mm
Air Hose ID.	13 mm
Overall Dimension	1400×600×800 mm
Weight	260 kg

The information contained in this document is believed to correct but A.E.G(Wuxi) Machinery Co., Limited accepts no liability for any errors it contains, and reserves the right to alter specifications without notice. Please consult the respective machine manual for all matters related to operations and maintenance.